



Model 1000HP Automotive-Aerospace Pressure Transducer

- Highest performance transducer over temperature. Zero thermal error/drift
- Units are individually calibrated from -40°C to 85°C for pressures ranging from 0-10" WC to 40,000 PSI
- 0.04% & 0.02% BFSL (STANDARD) – Contact Factory for other options
- 16 Point Calibration with Certificate (STANDARD)
- Unparalleled thermal stability from -40°C to 100°C
- Transducer maintains stated accuracy throughout entire temperature compensated range
- Duplicate any customer process and electrical connector for transparent replacement
- Push-Button Function Optional


“Spectre’s 1000HP Automotive-Aerospace Pressure Transducer is the World’s Top Performing Transmitter for Higher Accuracy Applications....”



FEATURES:

- Proprietary Fused Bond Sensor
- Sensor Wetted Material Machined from Stainless Steel Bar Stock (No Welds)
- RFI/EMI Protection
- Digital Correction for non-linearity and inaccuracies within the sensing element
- Output Options: 4-20 mA, 0-5 V, 0-10 V (custom on request)
- Suitable for high shock and vibration applications

REFERENCE DIMENSIONS:

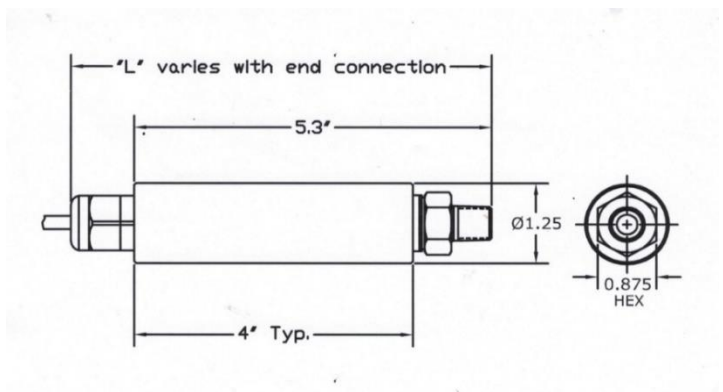

Spectre Corp
7912 Root Road
Suite C/D
North Ridgeville, Ohio 44039



www.SpectreCorp.com
Phone: (440) 250-0616
Fax: (440) 353-0269
E-Mail: info@spectresensors.com



Model 1000HP Automotive-Aerospace Pressure Transducer

Ordering Guide: 1000HP-A-(0-150PSI)-2-D-04-EC2-PB

A	(0-150)	2	D	04	EC2
PRESSURE PORT	RANGE ¹	TYPE	PRESSURE OUTPUT	ACCURACY (BFSL)	CONNECTOR ²
A = 1/4" MNPT	PSI	1 = ABSOLUTE	D = 4-20 mA	04 = 0.04%	EC1 = 36" PIGTAIL ³
B = SAE-4 MALE	BAR	2 = GAUGE	E = 0-5 VDC	02 = 0.02%	EC2 = LARGE DIN 43650, FORM A
C = OTHER	kPA	3 = VACUUM	F = 0-10 VDC		EC3 = MINI DIN 43650, FORM C
E = F-250 C	INCHES WC	4 = SEALED	M = mV/V		EC4 = BENDIX PTIH-10-6P
	TORR	5 = COMPOUND			ECT = TURCK M12
		6 = OTHER			ECX = OTHER

¹ OTHER RANGES AVAILABLE, CONSULT FACTORY

² CUSTOM PINOUTS/WIRING AVAILABLE, PLEASE SPECIFY UPON ORDER PLACEMENT

³ PVC STANDARD CABLE JACKET-OTHERS AVAILABLE ON REQUEST

PB OPTIONS
PB = PUSH BUTTON RE-ZERO
NO = NONE
OPX = OTHER (SPECIFY)

TYPICAL APPLICATIONS		
Engine Test Stands	Diesel-Internal Combustion	Laboratory
Leak Detection	Emission Testing	Bake Testing
Turbine-Rocket/Jet Engine Testing	Production Test Stand	Military
Transmission Testing	Off-road Vehicles	Tank Level

Performance @ 25 °C
Accuracy: $\pm 0.05\%$ BFSL to 0.02% BFSL
Stability: (2 year): $\pm 0.10\%$ FSO, Typical
Overpressure Protection: 2X Rated Pressure
Burst Pressure: 5X Minimum
Pressure Cycles: > 50 Million
Temperature Range: -40 °C to 100°C
Response: ≤ 2 ms to 90%

Environmental Data
Temperature
Operating: -40°C to 85°C
Storage: -50°C to 125°C
Thermal Limits
Compensated Range: -40°C to 85°C
Thermal Effect Zero: Negligible ⁴
Thermal Effect Span: Negligible ⁴

Electrical Data
Excitation: 13-36 VDC
Current Consumption: <math>< 5</math> mA
Zero Offset: $\leq \pm 0.1\%$ of FS
Span Tolerance: $\leq \pm 0.1\%$ of FS
Output Load: > 10K Ω

Physical Data
Sensor
Wetted Material: 316 SS
Housing: 316 SS
Connections
Pressure: 1/4" MNPT, SAE-4, F-250 C (Others on request)
Electrical: Cable, DIN, Bendix, M12 (Others on request)

⁴ Thermal changes will not affect overall accuracy

Spectre Corp
7912 Root Road
Suite C/D
North Ridgeville, Ohio 44039



www.SpectreCorp.com
Phone: (440) 250-0616
Fax: (440) 353-0269
E-Mail: info@spectresensors.com